RADIATORS

ALL THERM

ELEMENTS PAINTED WITH CATAPHORESIS DOUBLE LAYER
THIRD WORLD WIDE INDUSTRIAL GROUP
CE CONTROL CERTIFICATION
10 YEARS GUARANTY

ALUMINIUM RADIATOR

KAL

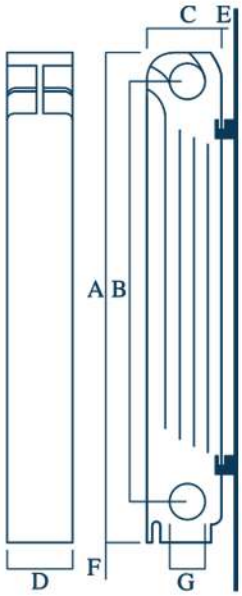

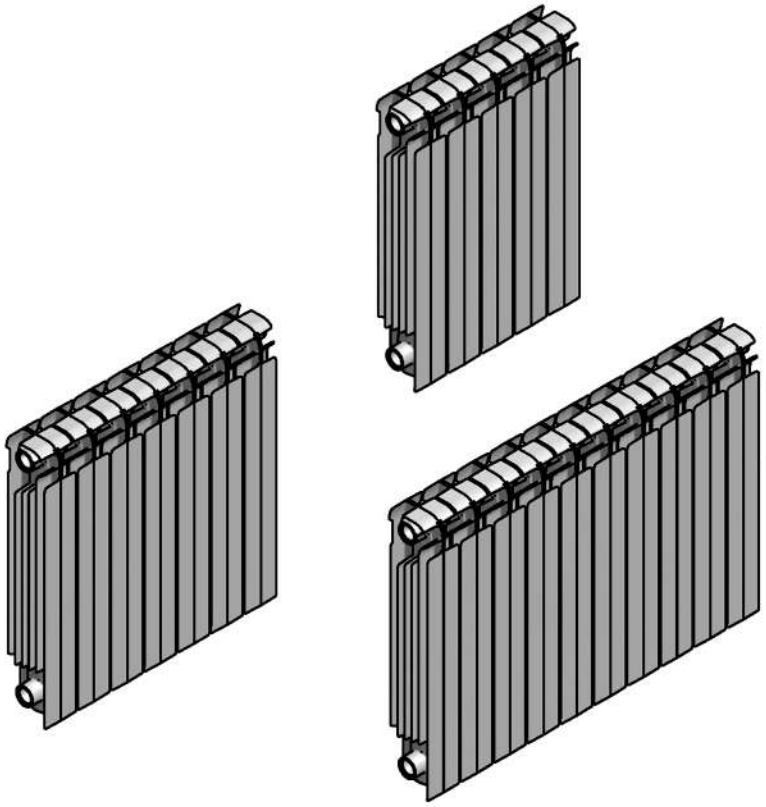

DIMENSIONS Y THERMAL CHARACTERISTICS																			
MODEL	ISO 3147 - 3150										A	B	C	D	E	F	G	WATER CAPACITY	WEIGHT PER ELEMENT
KAL	ΔT = 60°C			ΔT = 50°C			ΔT = 40°C			η									
	WATT	KCAL/H	BTU/H	WATT	KCAL/H	BTU/H	WATT	KCAL/H	BTU/H		MM	MM	MM	MM	MM	MM	INCH	LITRE	KG
350	138	119	472	108	93	369	80	69	273	1,323	429	350	97	80	25	120	1	0.34	1,2
500	177	152	603	138	119	472	102	88	349	1,335	579	500	97	80	25	120	1	0.46	1,5
600	202	174	690	158	136	539	116	100	396	1,348	679	600	97	80	25	120	1	0.52	1,7

Output in Watt/hr room temperature through tests according ISO 3147-3150.

Other Output Q = Qu $\left(\frac{\Delta\tau}{60}\right)\eta$

ALL THERM

ALL THERM (GIBRALTAR) LTD

HEADQUARTERS :
World Trade Center
6 Bayside Road 1st Floor – Unit 1.02
GX1 1AA Gibraltar
(+350) 200 60207
info@alltherm.group

SALES MANAGER :
Javier Martinez Lesmes
C/ López Bravo 7. Naves CAM 45
09001 Burgos
(+34) 639 324 269
j.martinez@alltherm.group

www.allthermgroup.com